

M16 SERIES

M16 square-flange panel-mount female receptacle solder termination mounting holes 20x20

CIRCULAR CONNECTOR / PRODUCT FAMILY GUIDE



M SERIES

PRODUCT FAMILY CODE

M160XX-04-005

11 ORDERABLE PART NUMBERS / 2 / 8 / 3 / 12 / 4 / 14 / 5 / 19 / 6 / 24 / 7 CONTACTS / STANDARD / IP67 / IP68

Product Overview



M16 SERIES / PRODUCT FAMILY

M16 square-flange panel-mount female receptacle solder termination mounting holes 20x20

M160XX-04-005

WLconnectivity's m16 square-flange panel-mount female receptacle solder termination mounting holes 20x20 family consolidates 11 exact orderable configurations covering 2, 8, 3, 12, 4, 14, 5, 19, 6, 24, 7-contact options. The configurations share the product platform and engineering references shown in this manual; exact selection details are listed in the ordering table.

Technical Specifications

Outer shell material	PA+GF / nickel-plated copper alloy / PA+GF
Housing material	PA+GF / TPU
Overmold material	TPU / PVC
Contact material	gold-plated brass / gold-plated phosphor bronze
Applicable temperature	-20 °C to +80 °C
Insulation resistance	≥ 100 MΩ
Contact resistance	≤ 5 mΩ
Degree of protection	IP67 / IP68
Mechanical durability	≥ 500 cycles

Configuration-specific Ratings

Electrical values that vary by contact count and coding

CONTACTS	CODING	RATED CURRENT	RATED VOLTAGE (AC)	RATED VOLTAGE (DC)	WIRE SIZE	WIRE GAUGE
2 / 3	Standard	7 A	250V	250V	0.75 mm ²	20 AWG
8 / 7	Standard	5 A	125V	125V	0.75 mm ²	20 AWG
12 / 14 / 19	Standard	3 A	60V	60V	0.25 mm ²	24 AWG
4 / 5	Standard	6 A	250V	250V	0.75 mm ²	20 AWG
6	Standard	5 A	250V	250V	0.75 mm ²	20 AWG
24	Standard	1 A	60V	60V	0.14 mm ²	26 AWG

Ordering Information

All exact orderable part numbers for this product family

FAMILY CODE M160XX-04-005

11 orderable part numbers


NO.	CONTACTS	CODING	CABLE OPTION	PART NUMBER
1	2	Standard	-	M16002-04-005
2	8	Standard	-	M16008-04-005
3	3	Standard	-	M16003-04-005
4	12	Standard	-	M16012-04-005
5	4	Standard	-	M16004-04-005
6	14	Standard	-	M16014-04-005
7	5	Standard	-	M16005-04-005
8	19	Standard	-	M16019-04-005
9	6	Standard	-	M16006-04-005
10	24	Standard	-	M16024-04-005
11	7	Standard	-	M16007-04-005

Engineering Reference

Shared dimensional and pin-assignment reference for this product family

DIMENSIONAL REFERENCE

DIMENSIONS IN MILLIMETRES

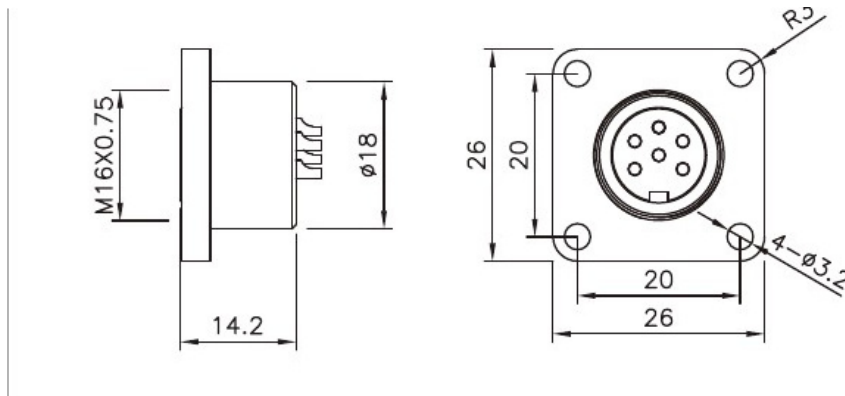

PIN ASSIGNMENT / FRONT VIEW

Contacts: 2 / 8 / 3 / 12 / 4 / 14 / 5 / 19 / 6 / 24 / 7 / Coding: Standard

